


5G MOBILE SMA ANTENNA



PARAMETER	RATED VALUE
Frequency Range	617~960, 1410~1610, 1710~2690, 3300~7125 MHz
Polarization	Linear (vertical)
Gain	4.5 dBi max
V.S.W.R	3 max
Impedance	50 Ω
Connector	SMA Male
Operating Temperature	-40 °C to +85 °C
IP rating	IP33
RoHS Compliant	✓
Weight	24 g

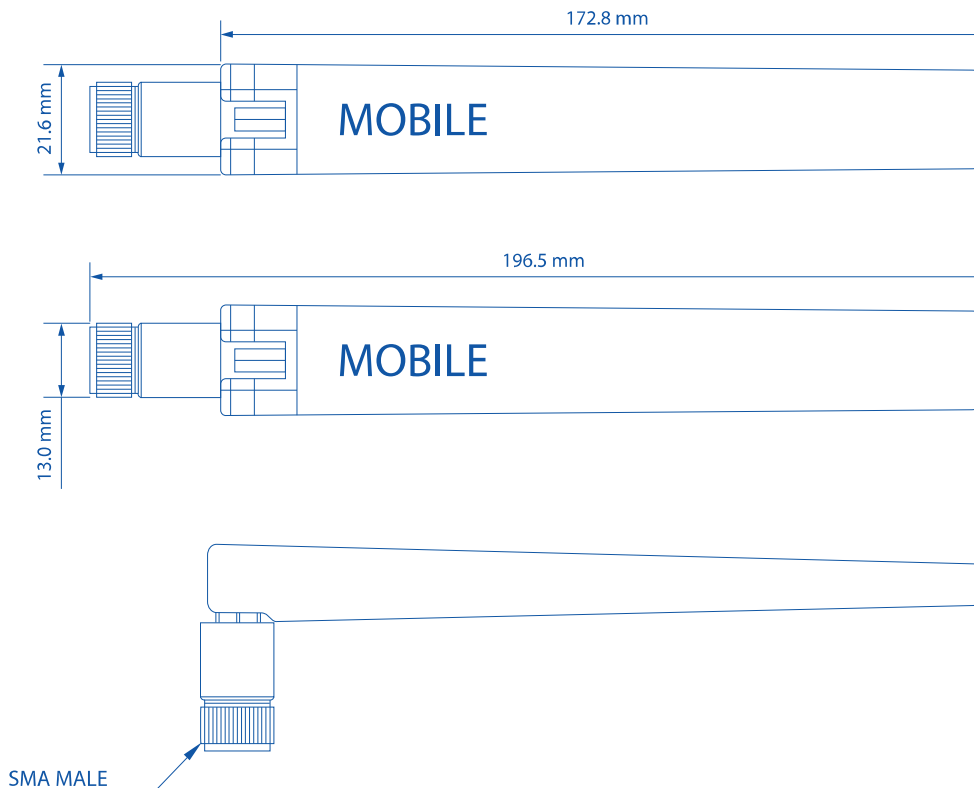

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Teltonika:

[PR1US540](#)